
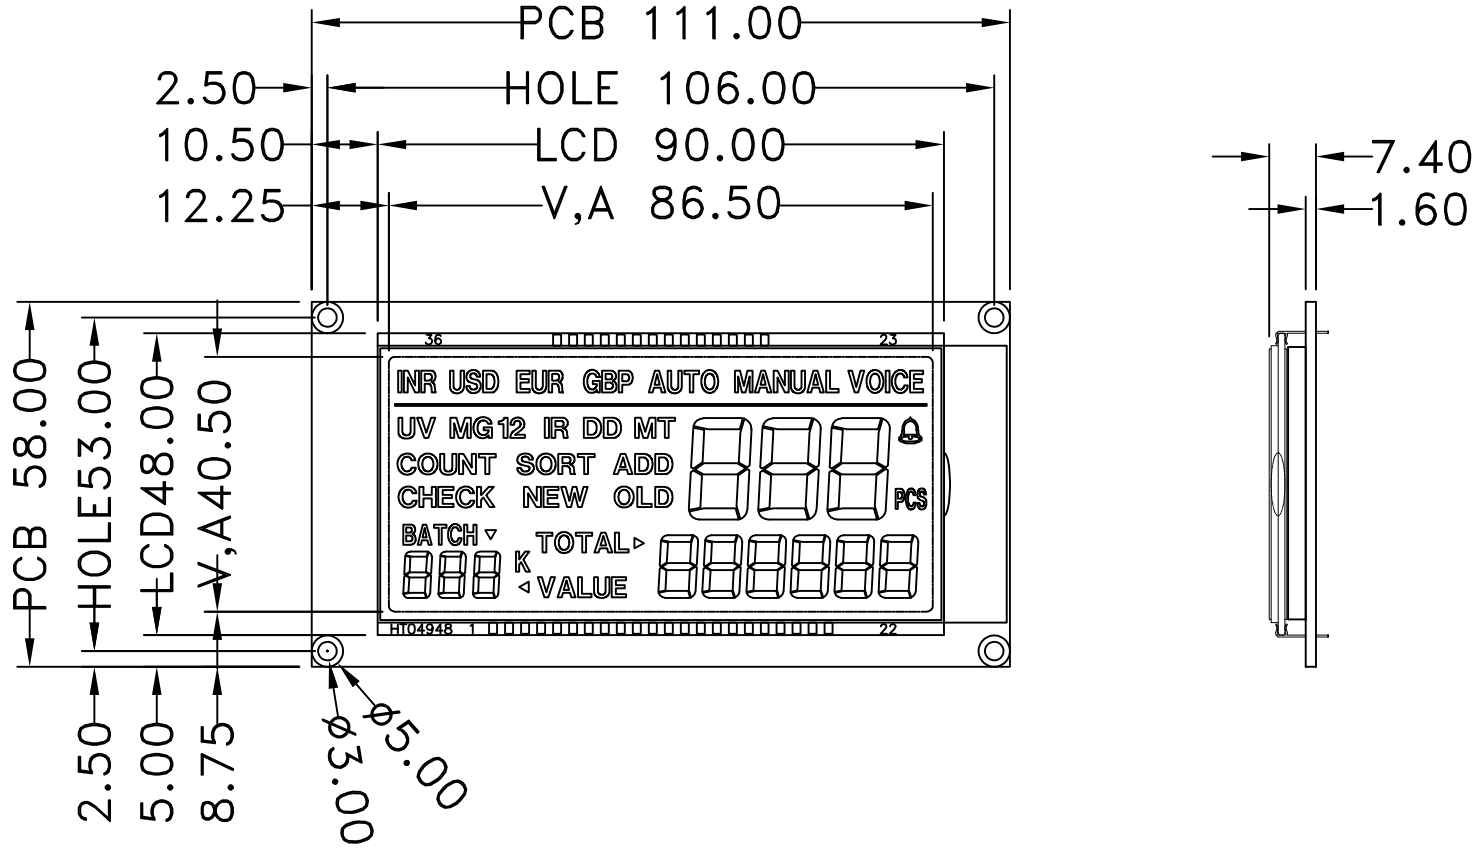


*1. LCD Display Type	FSTN,Transmissive,Positive		
*2. Viewing Diretion	6H	*6. Storage Temp	-10°C~60°C
*3. LCD Driver Mode	1/4Duty,1/3Bias	*7. Driver IC	VKS232A
*4. Operating Voltage	5.0V	*8. Backlight	4PCS WHITE LEDS VF=5.0V If=80mA
*5. Operating Temp	0°C~50°C	*9. ROHS	



Backlight Circuit
Scale=free

HOT DISPLAY

Dwg Title: HTM4948			
EDC No:		Ver: A/0	
Scale 1:1	Unit mm	Tol. ±0.3	
Drawn	Checked	Date: 2026-09-01	