


说明1: PCB兼容RS485接口设计  
 Description1: PCB compatible RS485 interface design

模块类型 Module Type	<input type="checkbox"/> EzUTC	<input type="checkbox"/> EzUIH	<input checked="" type="checkbox"/> EzUIlet	CN1 Pin_SIGNAL	CN2 Pin_SIGNAL
观看方向/角度 Viewing Direction	U40/D20/L45/R45 (Typ.)				
接口 Interface	<input checked="" type="checkbox"/> UART(TTL)	<input type="checkbox"/> RS232	<input checked="" type="checkbox"/> RS485	1 TX/A	
工作电压 Operating Voltage	VDD = +4.7 ~ 5.3V				
TFT 工作温度 TFT Operating Temp	-20 °C ~ +70 °C				
TFT 储存温度 TFT Storage Temp	-30 °C ~ +80 °C				
液晶模组亮度 LCM Brightness	350 cd/m <sup>2</sup> (Typ.)				
触摸功能(TP) Touch Function	<input checked="" type="checkbox"/> 无触摸NTP	<input type="checkbox"/> 电阻触摸ETP	<input type="checkbox"/> 电容触摸CTP		
更新资源方式 Update resource method	<input checked="" type="checkbox"/> USB_Type C	<input type="checkbox"/> TF Card	<input type="checkbox"/> 专用下载PCB		
资源存储容量 Resource Storage Capacity	<input type="checkbox"/> 1G-Bit	<input checked="" type="checkbox"/> 128M-Bit	<input type="checkbox"/> 1024K-Byte		

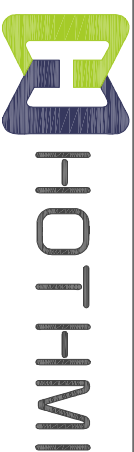

产品型号  
Product model  
HTM-H024B25-UART-A01

比例  
Scale  
1:1

设计制图  
Design  
Li u. YL

日期  
Date  
2025-03-28

版本  
Ver  
V0-0

单位  
Unit  
MM

公差  
Tol.  
±0.3

